

KOALA 1000 AF










Refrigerated container for the transport of food/pharmaceutical products at a controlled temperature

- Available in versions:
 - AF: temperature adjustment range: from **-18°C to +10°C**;
 - AFH: with heating kit and temperature adjustment range: from **-18°C e +40°C**.
- Insulation offered by container walls ensures that the temperature maintenance is guaranteed with a minimum number of ignitions of the cooling unit; this contributes limiting energy consumption.
- Cooling unit is triggered when inner temperature is higher than the temperature set with the programmable digital thermostat. This allows to maintain a constant temperature even in case of very high external temperatures.
- In the AFH versions, the heating unit is triggered when inner temperature is lower than the temperature set with the programmable digital thermostat. This allows to maintain a constant temperature even in case of very low external temperatures.
- Total compliance with the cold chain at all stages of transport.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Equipped with a low consumption fridge unit.
- Dual power supply: during the transport, it can be connected via Anderson connector or fork terminal to the battery (or auxiliary battery) of the vehicle and, once at destination, can be connected to the mains current.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- **Fully recyclable** at the end of the operating life.











MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and lid; suitable for food contact	Polyurethane	insulating material between the walls of the container and of the lid; free of CFC and HCFC
Silicone	gasket	Rubber and polyamide	castors (rubber tread and polyamide core)
Galvanized steel	cooling unit frame, hinge rods, plates connecting rods hinge, castors support	Stainless steel	handling handles, locking handle, inner rod of the door, hinge rod
Polypropylene	hinges		


TECHNICAL CHARACTERISTICS

<p>AF Version</p>	<ul style="list-style-type: none"> • from 0°C to +10°C • from -18°C to +10°C 	<p>AFH Version</p>	<ul style="list-style-type: none"> • from 0°C to +40°C • from -18°C to +40°C
<p>+/- 0,5 °C</p>	<p>Degree of accuracy in temperature adjustment:</p> <ul style="list-style-type: none"> • +/-0,5 °C 		<p>Protection against voltage drops of the vehicle battery, in case of falling below of the limit value of 11V</p>
	<p>Equipped with three cables: for power supply to 230Vac 50-60Hz</p>		<p>For power supply to 12Vdc</p> <ul style="list-style-type: none"> • with Anderson connectors • with Anderson terminal for connection to the Koala and fork terminals for connection to the battery of the vehicle
	<p>Cooling unit performance guaranteed for use at ambient temperature:</p> <ul style="list-style-type: none"> • from +10°C to +32°C 		<p>Container (insulated case) guaranteed for use:</p> <ul style="list-style-type: none"> • from -30° to +100°C
<p>GAS</p>	<p>Coolant gas:</p> <ul style="list-style-type: none"> • R452A 		<p>Hermetic compressor with electronic control unit for adjustment and control equipped with overvoltage protections</p>
	<p>The ventilation system ensures a greater speed and uniformity of diffusion of the cold inside the container</p>		<p>Adjustment and control of the temperature with programmable digital thermostat</p>
	<p>USB data logger available (on request) to record temperature data during transport</p>		<p>4 seats for housing of the grids positioned to 385/785/1185/1250mm from the bottom of the container. Grids available on request</p>


TECHNICAL CHARACTERISTICS

	<p>Stainless steel locking handle with release button; it is prepared for the use of tamper-proof system</p>		<p>Mono-block structure, no sharp edges, joints and welds</p>
	<p>Equipped with 4 rubber coated castors of 125 mm (2 fixed and 2 swivel of which one equipped with brake). Support runners plate integrated in the container</p>		<p>Possibility to insert:</p> <ul style="list-style-type: none"> - Pallets with galvanized steel frame 6 feet h 120 mm - 4 feet h 120mm in galvanized steel
	<p>Label holder (on request) for the identification of the content or destination. Suitable for A5 format documents</p>		<p>Double-pivot hinge system. Better door stability over time</p>
	<p>Door opens up to 270° with door retaining catch</p>		<p>Easily removable door seal</p>
	<p>Stainless steel rod with 2 hooks integrated inside the door</p>		<p>Internal grooves improving good air circulation</p>
	<p>Insulated with CFC and HCFC-free polyurethane foam</p>		

TECHNICAL SPECIFICATIONS

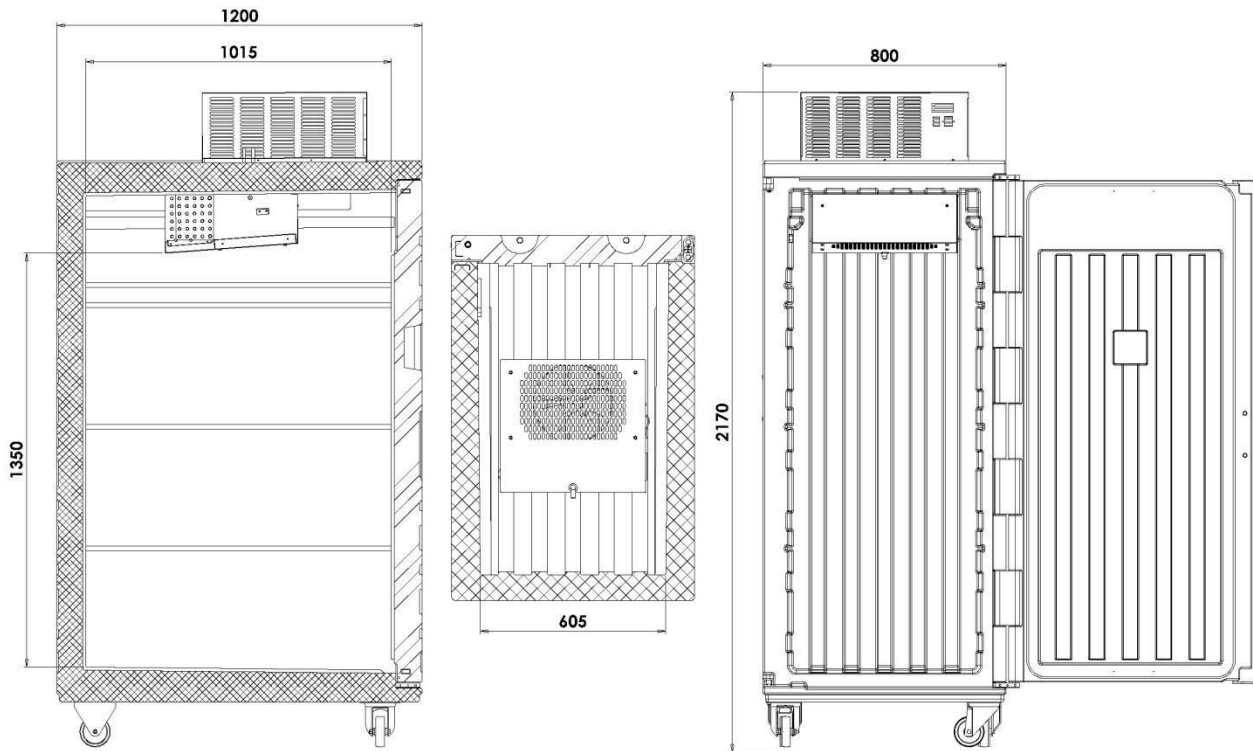

Model with cooling unit on top ventilated
code: K1000AFTVDYM1, K1000AFTVDZM1, K1000AFTVCYM1, K1000AFTVCZM1

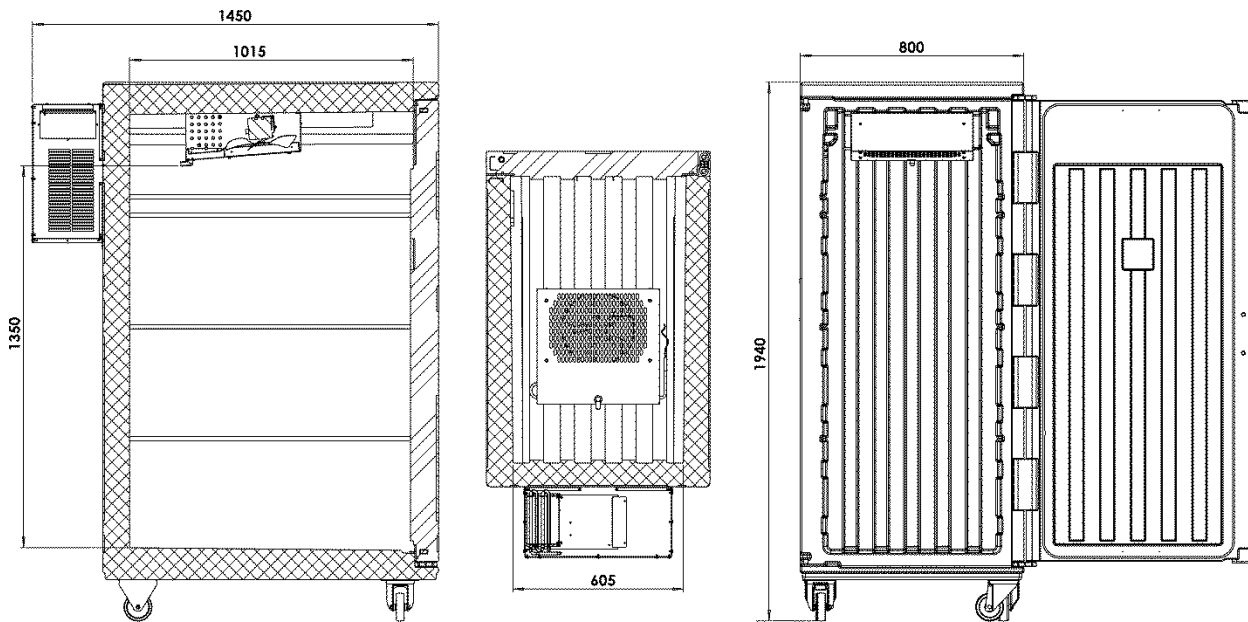

Model with cooling unit on back ventilated
code: K1000AFDVDYM1, K1000AFDVDZM1, K1000AFDVCYM1, K1000AFDVCZM1

Model	Code	Nominal absorption	Fuses			
AF VERSION						
Koala 1000 AF cooling unit on top ventilated from 0°C to +10°C	K1000AFTVDYM1	1A to 230Vac 25A to 12Vdc	4A for 230Vac 30A for 12Vdc			
Koala 1000 AF cooling unit on back ventilated from 0°C to +10°C	K1000AFDVDYM1	1A to 230Vac 25A to 12Vdc	4A for 230Vac 30A for 12Vdc			
Koala 1000 AF cooling unit on top ventilated from -18°C to +10°C	K1000AFTVCYM1	1A to 230Vac 25A to 12Vdc	4A for 230Vac 30A for 12Vdc			
Koala 1000 AF cooling unit on back ventilated from -18°C to +10°C	K1000AFDVCYM1	1A to 230Vac 25A to 12Vdc	4A for 230Vac 30A for 12Vdc			
AFH VERSION (with heating kit)						
Koala 1000 AFH cooling unit on top ventilated from 0°C to +40°C	K1000AFTVDZM1	1A to 230Vac 25A to 12Vdc	4A for 230Vac 30A for 12Vdc			
Koala 1000 AFH cooling unit on back ventilated from 0°C to +40°C	K1000AFDVDZM1	1A to 230Vac 25A to 12Vdc	4A for 230Vac 30A for 12Vdc			
Koala 1000 AFH cooling unit on top ventilated from -18°C to +40°C	K1000AFTVCZM1	1A to 230Vac 25A to 12Vdc	4A for 230Vac 30A for 12Vdc			
Koala 1000 AFH cooling unit on back ventilated from -18°C to +40°C	K1000AFDVCZM1	1A to 230Vac 25A to 12Vdc	4A for 230Vac 30A for 12Vdc			
Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity (liters)	Weight (Kg)
Koala 1000 cooling unit on top ventilated		melange grey blue	800X1200Xh2170	605x1015xh1350	830	164
Koala 1000 cooling unit on back ventilated		melange grey blue	800X1450Xh1940	605x1015xh1350	830	164
ACCESSORIES						
Label holder	AMC101	trasparent	173xh200	148xh210 -A5-		
Grid in stainless steel	AEA023	stainless steel	647x990xh16			5
Folding grid in stainless steel	AEA029	inox	647x990xh25			6