AF12



GN 1/1 12 RUNNERS

<image>

Front opening isothermal container for the transport of hot, chilled and frozen meals

- Fitted with 12 constant gauge runners, ideal to carry Gastronorm pans of equal height.
- Capacity: 90 litres.
- It assures proper heat retention, limiting the risk of bacterial proliferation whilst preserving food quality and organoleptic characteristics.
- The isothermal characteristics comply with current regulations (EC Reg. 852/2004 HACCP-) and with applicable technical standards (EN12571 and Accord AFNOR AC D40-007).
- Easily stacked and transferred, thanks to AF12 polyethylene trolley.
- Manufactured using the rotational moulding technology, allowing production of very sturdy objects without sharp edges, joints or welds, whilst assuring highly efficient temperature retention.
- Designed to be long lasting: performance remains basically unaltered when reused.
- Fully recyclable at the end of the operating life.

MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and of the door; food contact safe	Polyurethane	insulating material between the walls of the container and of the lid; free of CFC and HCFC
Silicone rubber	gasket	Fiberglass reinforced polyamide	hinges, clasps
Stainless steel	grip handles		


TECHNICAL CHARACTERISTICS



TECHNICAL CHARACTERISTICS

5 5.	 Polyethylene handling trolley capacity 150 Kg; 4 rubber coated, anti-tracking castors with PP centre; castors dia.: 125 mm; 2 fixed castors; 2 swivel castors, one of which fitted with a brake. 		Convenient and effective stainless steel interlocking kit. Available in two versions: • with 4 closures (to secure to 2 stacked containers and their trolley) • with 2 closures (to secure a single container to its trolley).
6	Adjustable venting valve.		Featuring a built-in label holder, allowing quick identification of contents or destination.
	Mono-block structure, no sharp edges, joints and welds.		Insulated with CFC and HCFC-free polyurethane foam.
	Available (on request) USB data logger to record temperature data during transport.	°C	Container guaranteed for use: from -30° to +100°C.

TECHNICAL SPECIFICATIONS

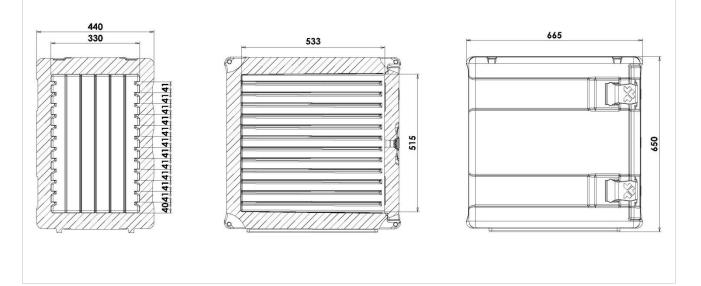

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity I	Weight Kg
	AF12H006	grey/blue mel.				
AF12	AF12H004	red	440x665xh650	330x533xh515	90	16,5
	AF12H005	blue				
AF12 Digital Active Door 240 V	3B3M0016	red	440x110xh570			5,2
AF12 Analogue Active Door 240 V	3B3M0018	red	440x110xh570			5,2
AF12 Body	3125H006F	grey/blue mel.	440x665xh650	330x533xh515	90	14
GN 1/1 Hot eutectic plate	PEGS0003	red	530x325xh30			3
GN 1/1 Chilled eutectic plate	PEGS0001	pink	530x325xh30			4
GN 1/1 Extra – chilled eutectic plate	PEGS9001	white	530x325xh30			4
GN 1/1 Frozen eutectic plate	PEGS0002	blue	530x325xh30			4
GN 1/1 Extra – frozen eutectic plate	PEGS9008	green	530x325xh30			4
AF12 Trolley	THS20009	grey/blue mel.	505x685xh205			6,4
Card label kit	RRI157		100 pcs. per kit			
GN1/1 Grid	AEA020	stainless steel	530x325xh12			1,3
4 closures Interlocking kit	RRI136	stainless steel	4 pcs. per kit			1,2
2 closures Mono interlocking kit	RRI137	stainless steel	2 pcs. per kit			0,6
USB Data logger	AFG002		80x33xh14			

SPARE PARTS

RRI0112	RRI004	RRI113	RRI024
Plastic latches kit	Blades for plastic latches kit	Hinge kit	Kit of gaskets
4 pieces for packing	4 pieces for packing	2 pieces for packing	5 pieces for packing

4 pieces for packing	4 pieces for packing	2 pieces for packing	5 pieces for packing
RRI030	RRI136	RRI137	
Vent valve kit	Interlocking kit	Mono interlocking kit	
10 pieces for packing	4 pieces for packing	2 pieces for packing	



Via Savigliano 34 - 12030 Monasterolo di Savigliano (CN) Tel. +39 0172812600 - Fax +39 017285991 - info@melform.com GPS: Lat 44.681363 - Long 7.624809 www.melform.com