



Front opening isothermal container for the transport of hot, chilled and frozen meals

- Fitted with 8 runners with constant pitch, ideal to carry GN pans of equal height.
- Capacity: 68 litres.
- It assures proper heat retention, limiting the risk of bacterial proliferation whilst preserving food quality and organoleptic characteristics.
- The isothermal characteristics comply with current regulations (EC Reg. 852/2004 –HACCP-) and with applicable technical standards (EN 12571 and Accord AFNOR AC D40-007).
- Easily stacked and transferred, thanks to the Smartdolly trolley.
- Produced with rotational moulding technology: the container and the door have a monolithic structure (devoid of corners, junctions and welds).
- Designed to be long lasting: performance remains basically unaltered when reused.
- Fully recyclable at the end of operating life.




MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and of the door; food contact safe	Polyurethane	insulating material between the walls of the container and of the door; free of CFC and HCFC
Silicone rubber	gasket	Fiberglass reinforced polyamide	hinges
Stainless steel	grip handles, latches	POM acetalic resin	handles covers

CHARACTERISTICS

	<p>Fitted with 8 runners with constant pitch (42 mm; see dimensional drawing).</p>		<p>It can carry:</p> <ul style="list-style-type: none"> • 4 GN 1/1 h 65; • 2 GN 1/1 h 150; • 1 GN 1/1 h 65 + 2 GN 1/1 h 200; • 1 GN 1/1 h 100 + 2 GN 1/1 h 200; • 1 eutectic plate + 1 GN 1/1 h 65 + 1 GN 1/1 h 200.
	<p>Fitted with an easily removable door that opens up to 240° for an easy washing.</p>		<p>Eutectic plates: hot (red), chilled (pink), extra chilled (sand), frozen (blue) and extra frozen (green), to extend temperature retention time (upon request).</p>
	<p>Stainless steel grip handles with handle cover.</p>		<p>Equipped with adjustable vent valve.</p>
	<p>Easily removable door gasket.</p>		<p>Stainless steel hook closures.</p>
	<p>Equipped with shockproof hinges, with high resistance to stresses.</p>		<p>Smartdolly trolley:</p> <ul style="list-style-type: none"> • capacity 150 Kg; • 4 rubber coated, anti-tracking castors with PP core; • castors dia: 100 mm; • 2 fixed castors; • 2 swivel castors. <p>Available with chrome or stainless steel handle.</p>
	<p>Monolithic structure, no sharp edges, joints and welds.</p>		<p>Insulated with CFC and HCFC-free polyurethane foam.</p>
	<p>USB data logger available (on request) to record temperature data during transport.</p>	<p>°C</p>	<p>Guaranteed for use: -30° to +100°C.</p>

TECHNICAL SPECIFICATIONS

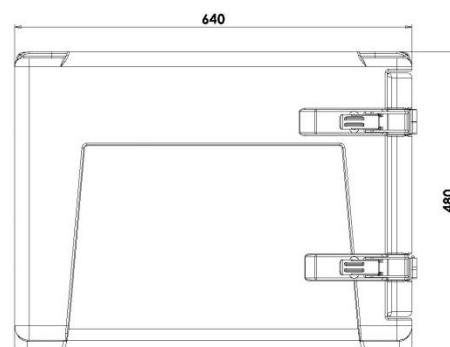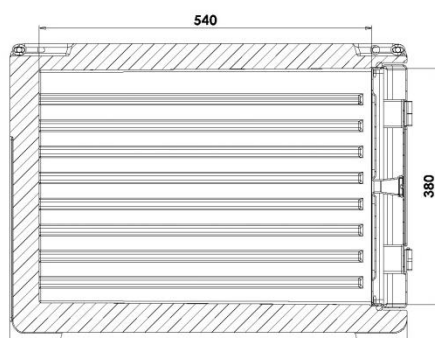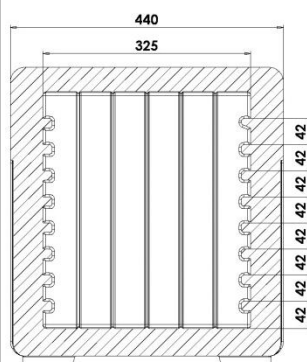

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
AF8	AF080006 AF080001 AF080004	grey/blue melange blue red	440x640xh480	325x540xh380	68	11
Hot plate GN 1/1	PEGS0003	red	530x325xh30			3
Chilled plate GN 1/1	PEGS0001	pink	530x325xh30			4
Extra chilled plate GN 1/1	PEGS9001	sand	530x325xh30			4
Frozen plate GN 1/1	PEGS0002	blue	530x325xh30			4
Extra Frozen plate GN 1/1	PEGS9008	green	530x325xh30			4
Smartdolly trolley chrome handle	MAXI0019	grey/blue melange	525x750xh965			9,5
Smartdolly trolley stainless steel handle	MAXI0018	grey/blue melange	525x750xh965			9,5
Smartdolly trolley without handle	MAXI9007	grey/blue melange	525x750xh210			7
Data logger USB	AFG007		80x33xh14			

SPARE PARTS

RRI019	RRI023	RRI113	RRI130	RRI030
Handle covers kit	Kit of gaskets	Complete hinge kit	Stainless steel interlocking kit	Vent valve kit
2 pieces per packing	5 pieces per packing	2 pieces per packing	4 pieces per packing	10 pieces per packing



Via Savigliano 34 - 12030 Monasterolo di Savigliano (CN)
Tel. +39 0172812600 - Fax +39 017285991 - info@melform.com
www.melform.com

