






Side opening isothermal container for the transport of hot, chilled and frozen meals

- The wide side opening eases load insertion and extraction operations.
- Capacity: 63 litres.
- It assures proper temperature retention, limiting the risk of bacterial proliferation whilst preserving food quality and organoleptic characteristics.
- The isothermal characteristics comply with current regulations (EC Reg. 852/2004 HACCP-) and with applicable technical standards (EN 12571 and Accord AFNOR AC D40-007).
- Stackable and easily movable, thanks to the Maxidolly trolley.
- Produced with rotational moulding technology: the container and the door have a monolithic structure (no sharp corners, junctions and welds).
- Designed to be long lasting: performance remains basically unaltered when reused.
- Fully recyclable at the end of the operating life.

MANUFACTURING MATERIALS				
Polyethylene	inner and outer walls of the container and of the door; food contact safe	Polyurethane	insulating material between the walls of the container and of the door; free of CFC and HCFC	
Silicone rubber	gasket	Fiberglass reinforced polyamide	hinges	
Stainless steel	carry handles, latches	POM acetalic resin	handles covers	

CHARACTERISTICS			
	 It can carry: 2 GN 1/1 h150 + 1 eutectic plate; 1 GN 1/1 h100 + 1 GN 1/1 h200 + 1 eutectic plate. 		Fitted with an easily removable door that opens up to 240°, facilitating washing.
	Eutectic plates: • hot (red) • chilled (pink) • superchilled (white) • frozen (blue) • extra frozen (green) to increase temperature retention performance over time (on request).).		Easily removable door gasket.
	Stainless steel carry handles with handle cover.		Equipped with adjustable vent valve.
	Melform closures in stainless steel.		Equipped with shockproof hinges, with high resistance to stresses.
	 Maxidolly trolley: capacity 150 Kg; 4 rubber coated, antitracking castors with PP core; castors dia: 100 mm; 2 fixed castors; 2 swivel castors. Available with chrome or stainless steel handle.	bengmola*	USB data logger available (on request) to record temperature data during transport.
	Monolithic structure, no sharp corners, junctions and welds.		Insulated with CFC and HCFC-free polyurethane foam.
°C	Container guaranteed for use: -30° to +100°C.		

TECHNICAL SPECIFICATIONS

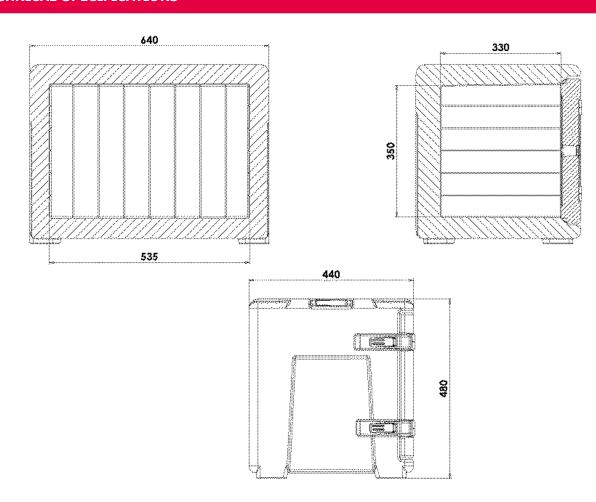

Model	Code	Colour	External dim. (mm)	Internal dim. Ca (mm)	pacity I	Weight Kg
AL300	AL300006	grey/blue melange	440×640×h480	330x535xh350	63	12
Hot plate GN 1/1	PEGS0003	red	530x325xh30			3
Chilled plate GN 1/1	PEGS0001	pink	530x325xh30			4
Superchilled plate GN 1/1	PEGS9001	white	530x325xh30			4
Frozen plate GN 1/1	PEGS0002	blue	530x325xh30			4
Extra-frozen plate GN 1/1	PEGS9008	green	530x325xh30			4
Maxidolly trolley chrome handle	MAXI0012	grey/blue melange	525x750xh965			9.4
Maxidolly trolley stainless steel handle	MAXI0011	grey/blue melange	525x750xh965			9.4
Maxidolly trolley without handle	MAXI9002	grey/blue melange	525x750xh210			7
Shelf PMS	35000006	grey/blue melange	650x955xh90			10 each
Data logger USB	AFG007		80x33xh14			

SPARE PARTS		
RRI130	RRI113	RRI019
Stainless steel interlocking kit	Complete hinge kit	Handle cover kit
4 pieces per package	2 pieces per package	2 pieces per package
RRI025	RRI030	
Gaskets kit	Vent valves kit	
5 pieces per package	10 pieces per package	

