AP100



GN 1/1 H 100



Top opening isothermal container for transport of hot, chilled and frozen meals

- Elegant appearance, attractive and functional, ideal for direct service.
- Indicated for transporting GN1/1 h 100 mm pans and submultiples.
- Lightweight and easy to manoeuver, thanks to the size and practical carry handles.
- Capacity: 17 liters.
- It assures proper heat retention, limiting the risk of bacterial proliferation whilst preserving food quality and organoleptic characteristics.
- The isothermal characteristics comply with current regulations (EC Reg. 852/2004 HACCP-) and with applicable technical standards (EN12571 and Accord AFNOR AC D40-007).
- Easily stacked and transferred, thanks to the Maxidolly trolley.
- Manufactured using the rotational moulding technology, allowing production of very sturdy objects without sharp edges, joints or welds, whilst assuring highly efficient temperature retention.
- Designed to be long lasting: performance remains basically unaltered when reused.
- Fully recyclable at the end of the operating life.


MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and of the lid; food contact safe	Polyurethane	insulating material between the walls of the container and of the lid; free of CFC and HCFC
Fiberglass reinforced polyamide	clasps	Stainless steel	grip handles
POM acetal resin	handle covers		

TECHNICAL CHARACTERISTICS

Suitable for transporting GN1/1 h 100 mm pans and submultiples: 1 GN 1/1 h100; 2 GN 1/2 h100; 3 GN 1/3 h100.		A stainless steel adapter (I= 530 mm code ABA005) to house GN1/4 and GN1/6 pans is available: • 6 GN 1/6 h100 + 1 ABA005; • 4 GN 1/4 h100 + 1 ABA005; • 2 GN 1/4 h100 + 3 GN 1/6 h100 + 1 ABA005.
Designed for direct service, thanks to the pans that lean on the container rim. This allows taking advantage of the container isothermal properties during service.	A CARLON CONTRACTOR	GN 1/3 chilled (green cap) and frozen (yellow cap) eutectic plates to improve temperature retention properties (on request).
Stainless steel grip handles with handle cover.		Melform clasps in shockproof material.
Military green version available (item subject to a minimum order quantity).	tempindis"	Available (on request) USB data logger to record temperature data during transport.
 Maxidolly trolley: capacity 150 Kg; 4 rubber coated, antitracking castors with PP core; castors dia: 100 mm; 2 fixed castors; 2 swivel castors. Available with chrome or stainless steel handle. 		Mono-block structure, no sharp edges, joints and welds.
Insulated with CFC and HCFC-free polyurethane foam.	°C	Container guaranteed for use: from -30° to +100°C.


TECHNICAL SPECIFICATIONS

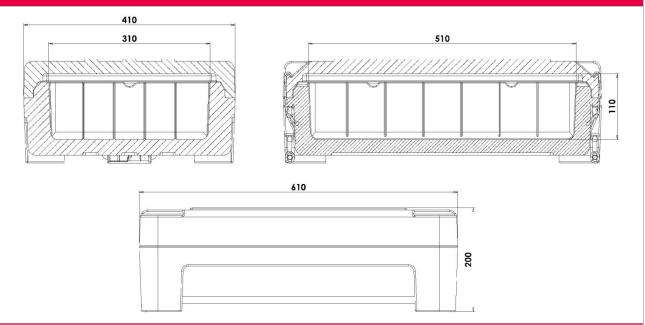

Model	Code	Colour	External dim. (mm)	Internal dim. Caj (mm)	pacity I	Weight Kg
AP100	AP100006 AP100001 AP100004	grey/blue mel. blue red	410x610xh200	310x510xh110	17	5.3
GN 1/3 Chilled eutectic plate	AGA003	white with green cap	176x325xh30			1.3
GN 1/3 Frozen eutectic plate	AGB003	white with yellow cap	176x325xh30			1.6
GN1/4 and GN1/6 Adapter	ABA005	stainless steel	l=530 mm			0.13
Maxidolly trolley chrome handle	MAXI0012	grey/blue melange	525x750xh965			9.4
Maxidolly trolley stainless steel handle	MAXI0011	grey/blue melange	525x750xh965			9.4
Maxidolly trolley without handle	MAXI9002	grey/blue melange	525x750xh210			7
PMS Shelf	35000006	grey/blue mel.	650x955xh90			10 each
USB Data logger	AFG007		80x33xh14			

SPARE PARTS







RRI019	RRI112	RRI004
Handle- cover kit	Plastic latches kit	Blades for plastic latches kit
2 pieces for packing	4 pieces for packing	4 pieces for packing



Via Savigliano 34 - 12030 Monasterolo di Savigliano (CN) Tel. +39 0172812600 - Fax +39 017285991 - info@melform.com www.melform.com