



















Isothermal container for the transport of chilled and frozen products at a controlled temperature








- Suitable for supermarket chains, logistics operators, chilled or frozen food distributors and manufacturers, carriers.
- **EUROPALLET external dimensions** (80x120 cm): it optimises the use of the loading area of the vehicle.
- 1,000 litres of capacity.
- Total compliance with the cold chain at all stages of transport.
- Speeds up distribution operations at the point of sales: it can be loaded inside the cold room of the wholesale centre and unloaded at the refrigerated counter of the destination supermarket.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Manufactured using the rotational moulding technology: monoblock container and door (free of sharp edges, joints and welds).
- **Fully recyclable** at the end of the operating life.

MANUFACTURING MATERIALS


Polyethylene	inner and outer walls of the container and the door; suitable for food contact	Polyurethane	insulating material between the walls of the container and the door; free of CFC and HCFC
Silicone	seal	Nylon	wheels
Polypropylene	hinges	Stainless steel	handling handles, closing handle, inner rod of the door
Galvanised steel	hinge rods, connecting rods hinged plates, runner support		

TECHNICAL CHARACTERISTICS

	<p>4 runners 125 mm diameter (2 fixed and 2 swivel of which one equipped with brake).</p> <p>Support runners plate integrated in the container.</p>		<p>h 120 mm six support feet pallet with galvanised frame. Alternatively, the possibility of inclusion of 4 feet h 120mm in galvanised steel.</p>
	<p>4 seats for housing of grids positioned to 385/785/1185/1250mm from the bottom of the container.</p> <p>Grids available on request.</p>		<p>Available (upon request) an intermediate grid equipped with a water collection tray.</p>
	<p>Stainless steel locking handle with release button.</p>		<p>Handle prepared for the use of tamper-proof system.</p>
	<p>Chilled, frozen and extra frozen eutectic plates, to increase temperature retention performance over time (on request).</p>		<p>Available (upon request) an eutectic plate blocking kit.</p>
	<p>In fish transport configuration, a drainage system allows the water collection and drainage (thanks to the expansion plug).</p>		<p>In fish transport configuration a drip-tray is available upon request.</p>
	<p>A lower grid, available upon request for fish transport configuration, protects the food from the contact with the water and give a support base for the products.</p>		<p>In fish transport configuration, a "breakwater" grid is available (upon request) to prevent the water leaking when the container is open.</p>
	<p>Label holder (on request) for the identification of the content or destination.</p> <p>Suitable for A5 format documents.</p>		<p>Available (on request) stainless steel frames with two or three bars for transport of hanging meat carcasses.</p>
	<p>Internal temperature can be checked through a thermometer installed in the door (on request).</p>		<p>Available (on request) USB data logger to record temperature data during transport.</p>

	Mono-block structure, no sharp edges, joints and welds.		Internal grooves improving good air circulation.
	Door opens up to 270° with door retaining catch.		Easily removable door seal.
	Dual pivot hinge system. Better stability of the door over time.		Stainless steel rod with 2 hooks integrated inside the door.
	Insulated with CFC and HCFC-free polyurethane foam.	K	Overall heat transmission coefficient: K = 0.33 W/m²K
°C	Guaranteed for use: from -30° to +100° C.		

TECHNICAL SPECIFICATIONS

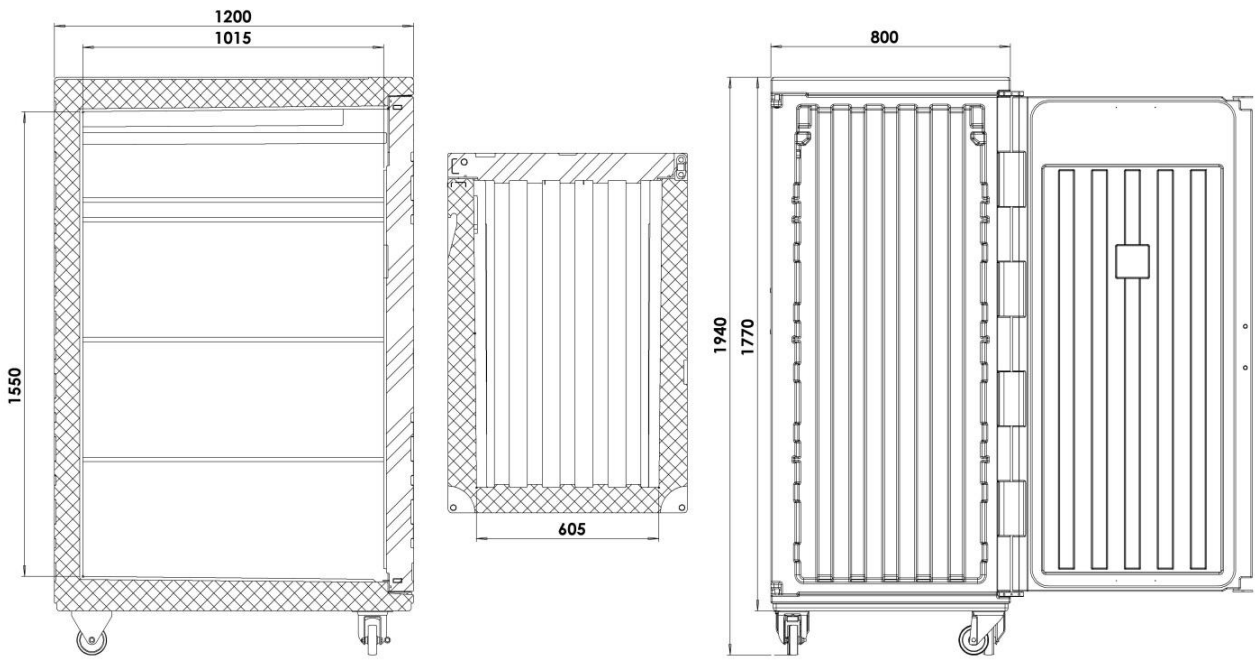

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity (liters)	Weight (Kg)
Cargo 1000 with runners	10000001EU	melange grey blue	800x1200xh1940	605x1015xh1550	1000	130
Cargo 1000 with feet	100000010EU	Melange grey blue	800x1200xh1900	605x1015xh1550		130
Cargo 1000 with pallet	100000002EU	melange grey blue	800x1200xh1900	605x1015xh1550	1000	155
Label holder	AMC101	transparent	173xh200	148xh210 -A5-		
Grid in stainless steel	AEA023	stainless	647x990xh16			5
Folding grid in stainless steel	AEA029	stainless	647x990xh25			6
Eutectic plate Chilled +3°C - 2 x Cargo -	PE9000001	pink	600x487xh50			10
Eutectic plate Frozen - 21°C - 2 x Cargo -	PE9000002	blue	600x487xh50			10
Eutectic plate Extra frozen - 21°C - 2 x Cargo -	PE900908	green	600x487xh50			10
Data logger USB	AFG007		80x33xh14			
FISH TRANSPORT CONFIGURATION						
Water drain system	ASC011					
Stainless steel grid	AEA027					
Drip tray	3518					