



## Insulated chest container for Dry Ice transport and delivery

- Comfortable top opening, useful for optimizing the load capacity
- Containment capacity: 430 kg of dry ice in 3 mm pellets.
- Base with wheels or pallets.
- Reduced height from the ground to facilitate load and collection.
- Perfectly stackable, thanks to the special housings on the lid.
- Produced with rotational molding technology: container and monobloc door (without sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.
- Easily washable.
- DrIcy containers are suitable for the containment of dry ice at the temperature of -78.5 C. Each plastic material is subject to embrittlement when subjected to extremely low temperatures, therefore it is recommended to avoid the use of metal objects for the removal of dry ice residue possibly remaining on the bottom of the container


### MANUFACTURING MATERIALS

<b>Polyethylene</b>	inner and outer walls of the container and the lid; suitable for food contact.	<b>Polyurethane</b>	insulating material between the walls of the container and the lid; free of CFC and HCFC.
<b>Silicone</b>	gasket.	<b>Stainless steel</b>	closing hooks, gas springs protection casing.
<b>Galvanized steel</b>	hinge rods, reinforced frame, feet.		

## TECHNICAL CHARACTERISTICS

	<p>Double adjustable stainless steel closure with eyelet for seal.</p>		<p>Flat bottom with central drain holes.</p>
	<p>Easily replaceable lid sealing gasket.</p>		<p>Hole with drainage cap positioned on the bottom of the container.</p>
	<p>Ergonomic recess handle on the cover to facilitate safe handling.</p>		<p>Dedicated housings for stacking containers.</p>
	<p>Reinforcement frame in galvanized steel.</p>		<p>Version with 4 wheels (2 swivelled and 2 swivelled with brake).</p>
	<p>Gas springs shock absorber system to facilitate the opening.</p>		<p>Gas spring protection systems in stainless steel.</p>
	<p>Monobloc structure, without sharp edges, joints and welds. Insulation with CFC-free and CFFC-free polyurethane foam.</p>		<p>Label holder for the identification of the content or destination.</p>
<p><b>K</b></p>	<p>Overall heat transmission coefficient: <b>K=0,29 W/m²K.</b></p>		

## TECHNICAL SPECIFICATIONS

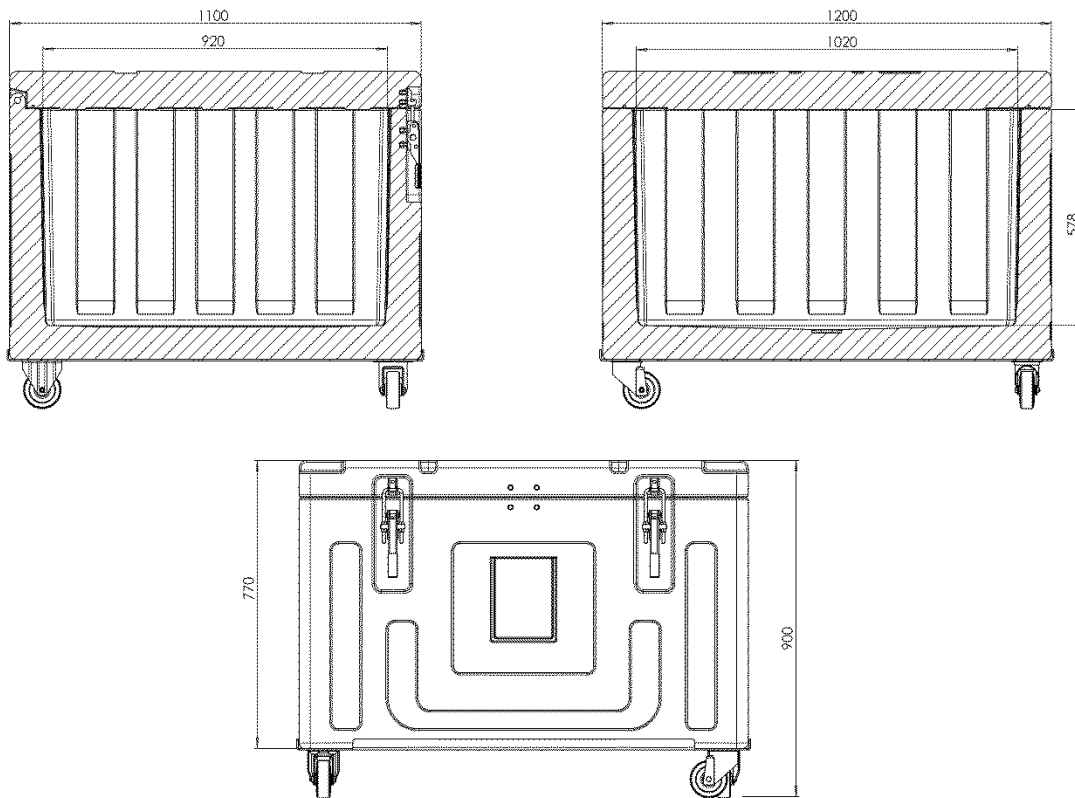

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity (liters)	Weight (kg)
DrIcy 540 with castors	0540S001	grey blue melange	1100X1200Xh900	920x1020xh578	540	100
DrIcy 540 with pallet	0540S002	grey blue melange	1100X1200Xh900	920x1020xh578	540	100