



Insulated chest container for Dry Ice transport and delivery

- Comfortable top opening, adjustable stainless steel closure.
- Containment capacity: 75 kg of dry ice in 3 mm pellets, 55 kg in 10 mm and 50 kg in 16 mm.
- Ideal for dry ice deliveries in applications such as fresh/frozen food distribution for e-commerce, home delivery, last mile, grape harvesting and temperature control in food processes.
- Perfectly stackable, thanks to the special housings on the lid.
- The small dimensions allow transport on traditional small and medium-sized vehicles.
- Produced with rotational molding technology: container and monobloc door (without sharp edges, joints and welds).
- Reusable and fully recyclable at the end of the operating life.
- Perfectly washable and sanitised.
- DrIcy containers are suitable for containing dry ice at a temperature of $-78,5\text{ }^{\circ}\text{C}$.
- Any plastic material is susceptible to embrittlement when subjected to extremely low temperatures, so it is recommended to avoid using metal objects to remove any residual dry ice that may remain at the bottom of the container.


MANUFACTURING MATERIAL

Polyethylene	inner and outer walls of the container and the lid; suitable for food contact.	Polyurethane	insulating material between the walls of the container and the lid; free of CFC and HCFC.
Silicone	gasket.	Stainless steel	closing hooks and handles.
Galvanized steel	hinge rod.		

TECHNICAL CHARACTERISTICS

	<p>Can also be used in upright position with front opening.</p>		<p>Adjustable stainless steel fasteners with eyelet for seal.</p>
	<p>Flat bottom.</p>		<p>Easily replaceable lid sealing gasket.</p>
	<p>Reinforced structure for strength.</p>		<p>Stainless steel handles moulded into the body to facilitate safe handling.</p>
	<p>Dedicated housings for stacking containers.</p>		<p>Monobloc structure, without sharp edges, joints and welds. Insulation with CFC-free and CFFC-free polyurethane foam.</p>
	<p>Label holder for the identification of the content or safety card.</p>		<p>Handling trolley made of polystyrene-coated metal, with ABS corners.</p> <ul style="list-style-type: none"> - 4 anti tracking rubber castors - castor diameter: 100 mm - 2 swivelling castors - 2 castors with brake
<p>K</p>	<p>Overall heat transmission coefficient: K=0,28 W/m²K.</p>		

TECHNICAL SPECIFICATIONS

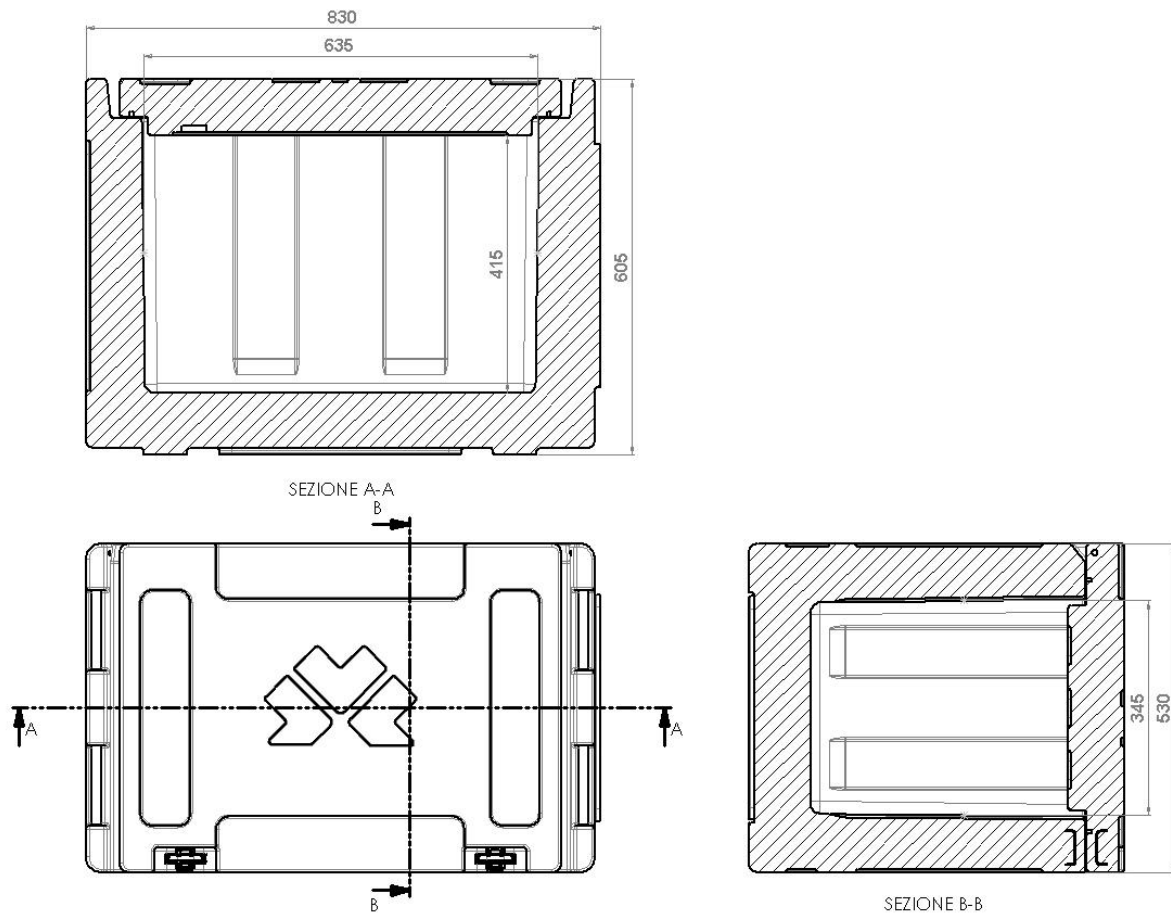

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity (litri)	Weight (kg)
DrIcy 90	0090S001	melange grey blue	860x530xh605	635x345xh415	90	25
ACCESSORIES						
Handling trolley	THD90001	grey	835x545xh170			6,5

